


Blikač s dvoma led – striedavé blikanie

```
void setup() {  
  pinMode(13, OUTPUT);  
  pinMode(12, OUTPUT);  
}  
void loop() {  
  digitalWrite(13, HIGH);  
  digitalWrite(12, LOW);  
  delay(1000);  
  digitalWrite(13, LOW);  
  digitalWrite(12, HIGH);  
  delay(1000);  
}
```

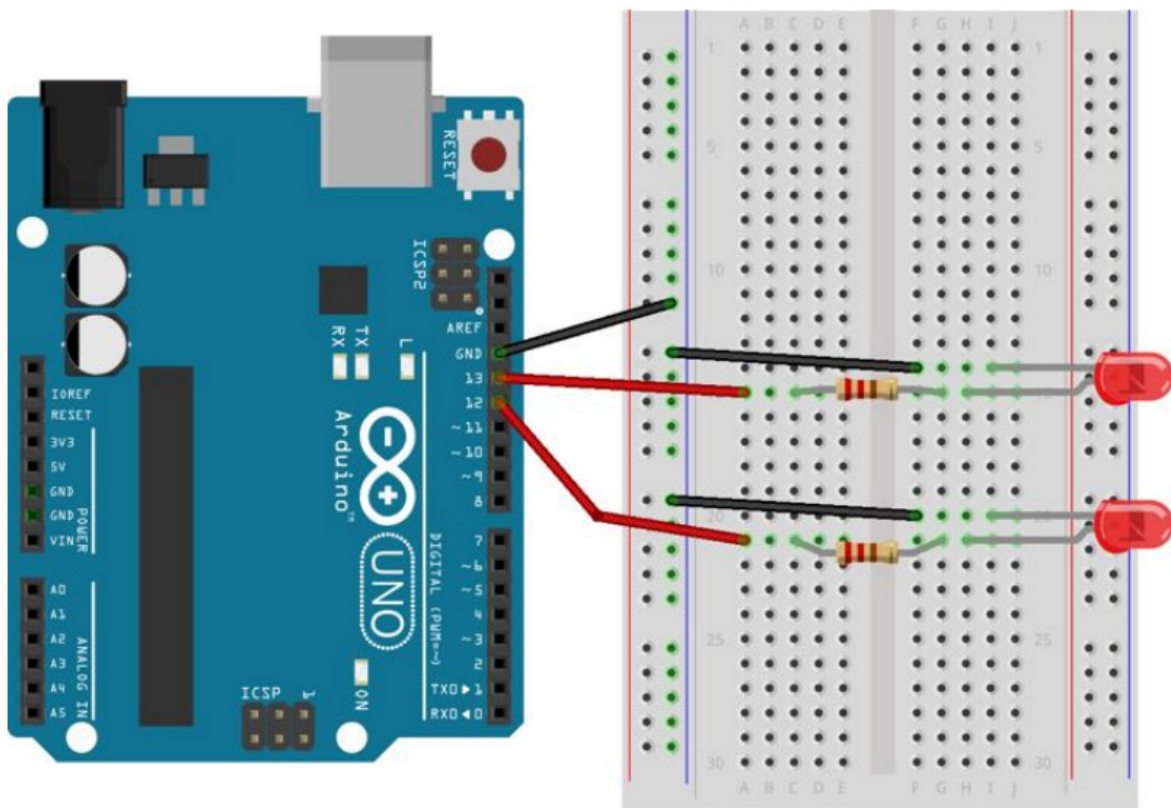

Striedavé blikanie dvoch LED diód, každá blikne dvakrát, vždy po 1 sekunde. Mezi oboma diódami bude pauza dve sekundy.

```
void setup() {  
  pinMode(13, OUTPUT);  
  pinMode(12, OUTPUT);  
}  
void loop() {  
  digitalWrite(12, LOW);  
  digitalWrite(13, HIGH);  
  delay(1000);  
  digitalWrite(13, LOW);  
  delay(1000);  
  digitalWrite(13, HIGH);  
  delay(1000);  
  digitalWrite(13, LOW);  
  delay(2000);  
  digitalWrite(12, HIGH);  
  delay(1000);  
  digitalWrite(12, LOW);  
  delay(1000);  
  digitalWrite(12, HIGH);  
  delay(1000);  
  digitalWrite(12, LOW);  
  delay(2000);  
}
```